

EQUALIZER

PLANTING YOUR FUTURE



MIN-TILL TINE SEEDER



TINE FEATURES

1 Quick depth adjustment clip



2 Two Closing Wheel options:



Narrow semi-pneumatic press wheel



Wide press wheel

3 Press wheel allows for slight lateral swing



4 Powder coating finish

5 Shear options:



Knife point shear



Aerator shear



Narrow Knife point shear

6 Two seeding-boot options:


- A Split option places seed in 2 rows, 60mm apart
- B Standard single chute




TINE TRIP ACTION:



Seed Fertiliser

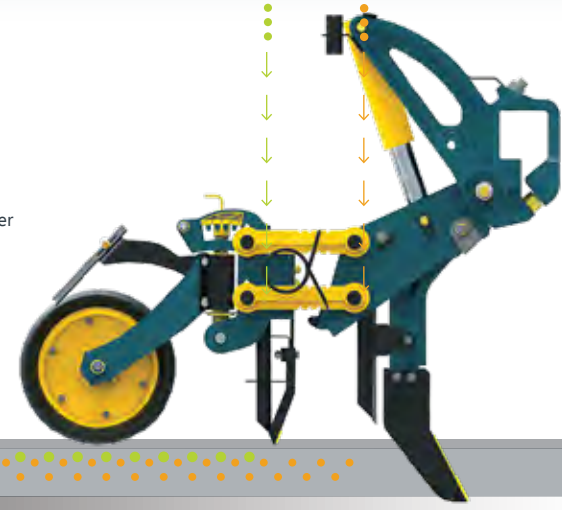

ON-FRAME LIQUID TANK:

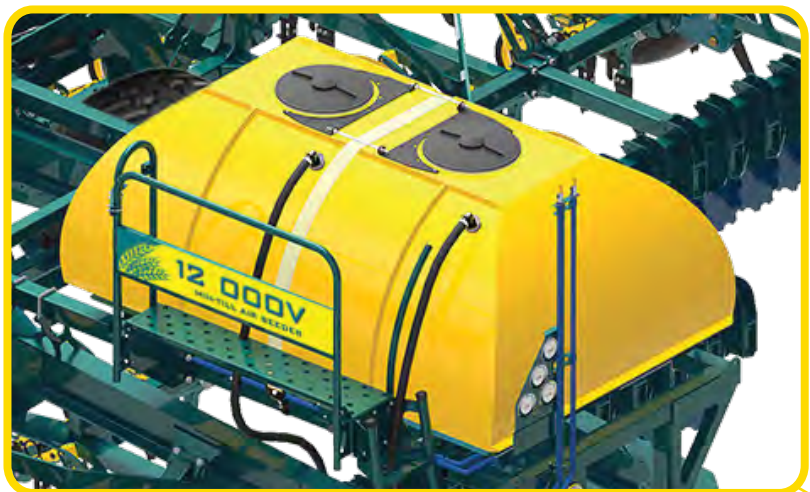


710-45-22.5 Michelin Flotation Wheels on 3meter centres (CTF Ready)



HYDRAULIC COULTER:

- Sealed SKF Agri Hub
- Trash clearance capability
- 560mm Large cutting disc
- Hydraulic storage when not in use

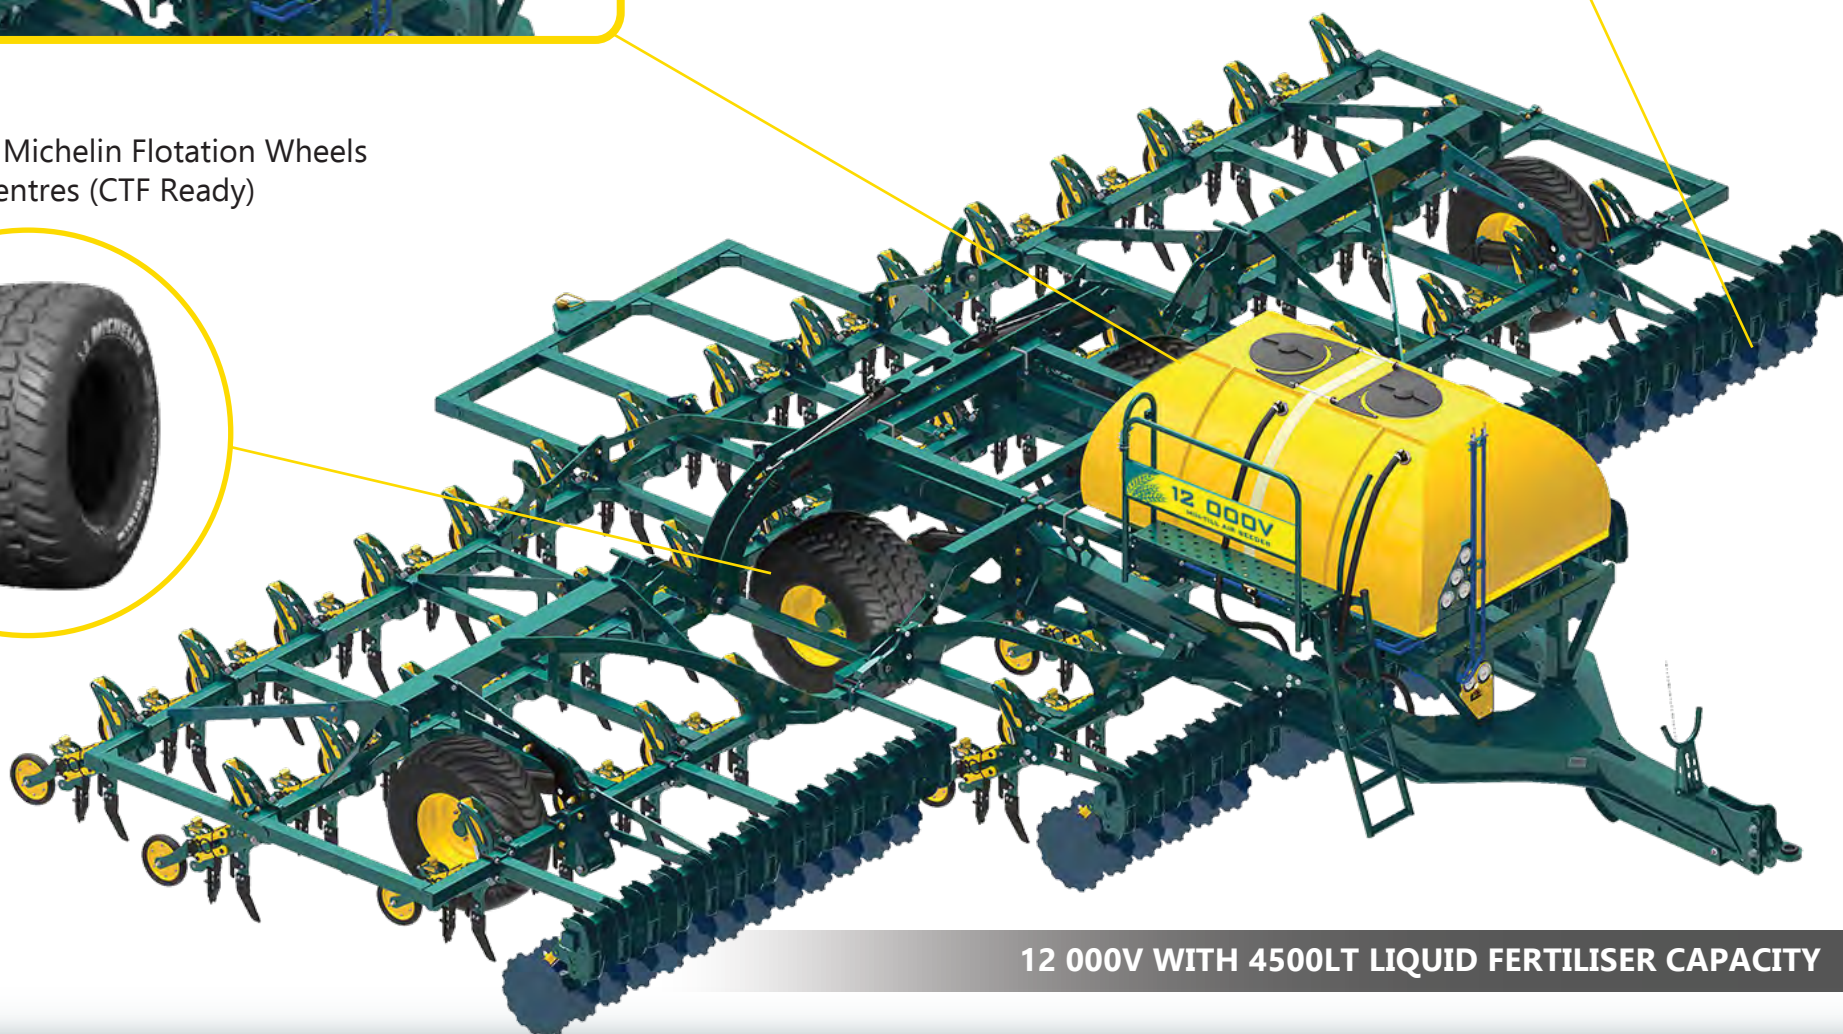

12 000V WITH 4500LT LIQUID FERTILISER CAPACITY

WE ARE A LEADER IN THE DESIGN, MANUFACTURE AND GLOBAL DISTRIBUTION OF AGRICULTURAL IMPLEMENTS.

MIN-TILL TINE SEEDER 3 SECTION 9000V – 12000V

273mm or 300mm row spacing available

WORKING WIDTH	NUMBER OF ROWS	KW REQUIRED	TRANSPORT HEIGHT	TRANSPORT WIDTH	MAX TANK CAPACITY
9m-12m	30-44	210-308	3.5m-5.2m	6.0m	6000LT GRANULAR OR LIQUID

MIN-TILL TINE SEEDER 12000VX - 18000VX


3 SECTION VERTICAL FOLD 273mm or 300mm row spacing available

WORKING WIDTH	NUMBER OF ROWS	KW REQUIRED	TRANSPORT HEIGHT	TRANSPORT WIDTH	MAX TANK CAPACITY
12m	40-44	280-308	5.2m	6.0m	4500LT LIQUID

5 SECTION VERTICAL NARROW FOLD 273mm or 300mm row spacing available

WORKING WIDTH	NUMBER OF ROWS	KW REQUIRED	TRANSPORT HEIGHT	TRANSPORT WIDTH	MAX TANK CAPACITY
15m-18m	50-66	350-462	5.0m	6.0m	4500LT LIQUID

12000VX bar can be upgraded to 15m bar or 18m bar

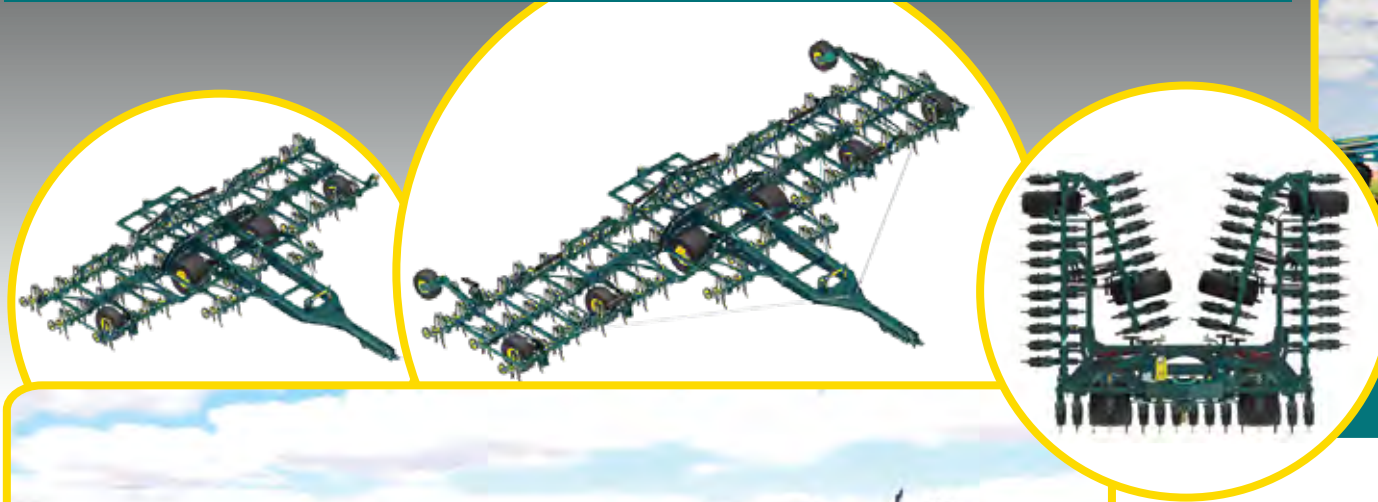

CONTACT YOUR NEAREST DEALER:



WWW.EQUALIZER.CO.ZA

info@equalizer.co.za | +27(0)21 981 2161

